




TECHNICAL

DATA SHEET

PLATFORM STAIRLIFT

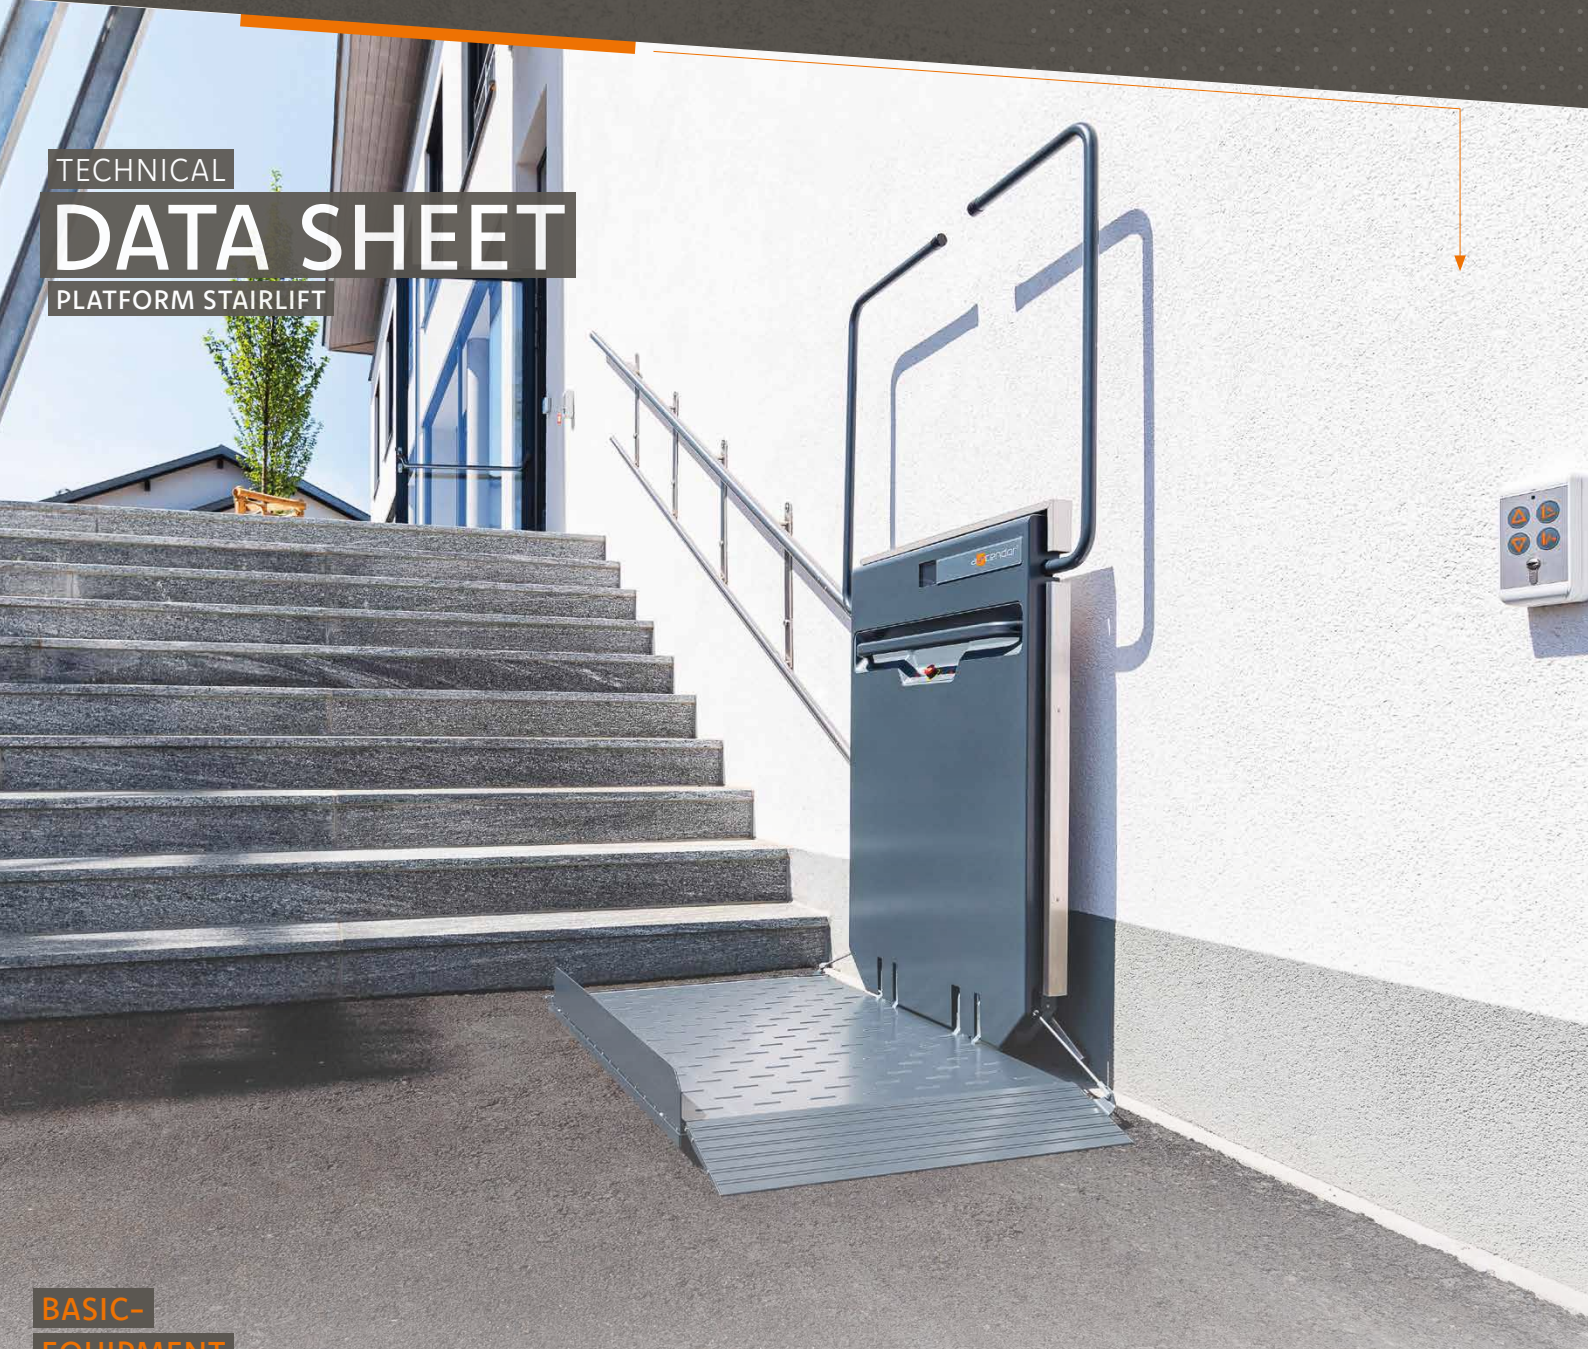

BASIC-EQUIPMENT

- ↑ fully automated control of safety arms and platform
- ↑ handrail and drive rack made out of stainless steel
- ↑ sensor keys on touchpad
- ↑ smooth start/stop and velocity reduction in the curve
- ↑ emergency call button and emergency stop function
- ↑ safety contacts on all sides
- ↑ 24V battery drive with charger
- ↑ anti-slip nabs on platform
- ↑ battery protection function - automatic shutdown when not charged

TECHNICAL

- ↑ touch-color-display
- ↑ integrated error memory
- ↑ numerous adjustment possibilities
- ↑ automatic folding of the platform possible

DESIGN/COMFORT

- ↑ RGB-LED lighting
- ↑ individual design of the contact tray with personalized picture
- ↑ voice output

LED



ADHESIVE FILM



PLATFORM SIZE IN mm

- ↑ 800 x 800, 800 x 760, 800 x 710, 800 x 650
- ↑ 900 x 800, 900 x 760,
- ↑ 1000 x 900, 1000 x 800*, 1000 x 760, 1000 x 710
- ↑ 1210 x 830, 1250 x 800*, 1300 x 800

*possible in stainless steel

FLEXIBILITY

- ↑ installation over several floors with stops possible
- ↑ subsequent extension of the rail possible

COLOR

- ↑ RAL 9006 silvermetallic
- ↑ RAL color upon request (optional)
- ↑ stainless steel (optional)

REMOTE CONTROL

- ↑ wall mounted, key operated remote control
- ↑ handheld remote control

MATERIAL

- ↑ steel-/aluminium light-weight construction
- ↑ supporting components of galvanized steel
- ↑ cover of scratch-resistant plastic

INCLINATION

- ↑ 6-47° (50° optional)

TRAVEL RAIL

- ↑ clean stainless steel handrail
- ↑ stainless steel rack

VELOCITY

- ↑ max. 9 m/min

CARRYING CAPACITY

- ↑ 225 kg standard (300 kg optional)

REQUIRED SPACE

- ↑ 25,5 cm - 31 cm when folded